
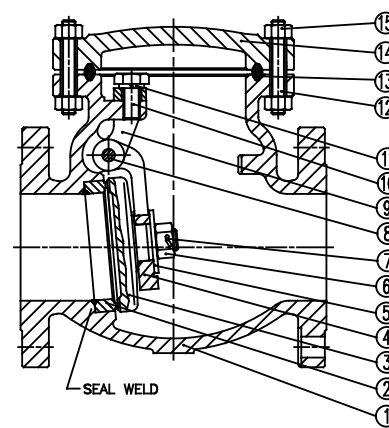


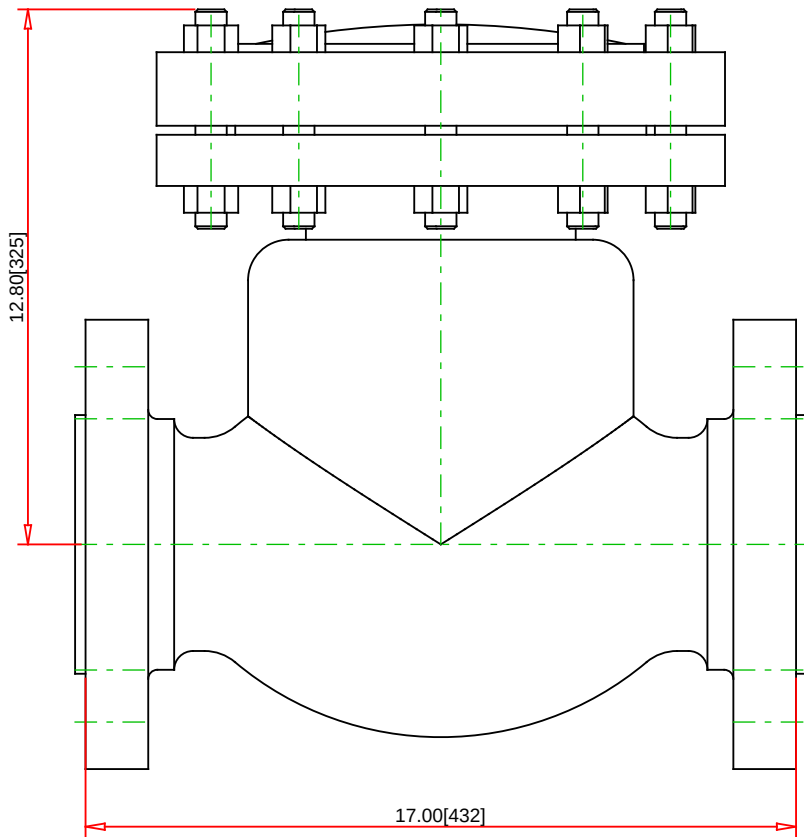

IT.	PART NAME	MATERIAL
1	BODY	A216 WCB
2	SEAT RING	A105 + STELLITE 6
3	DISC	A216 WCB + 13% CR.
4	HINGE	A216 WCB
5	WASHER	STEEL
6	DISC NUT	A182 304
7	PIN	A182 F321
8	HINGE PIN	A182 F6a
9	HINGE BRACKET	A216 WCB
10	HINGE BOLT	A182 F304
11	SPRING WASHER	ASTM A713
12	COVER BOLTS	A193 B7
13	GASKET	SOFT IRON
14	COVER	A216 WCB
15	COVER NUT	A194 2H
16	EYE BOLT	A105

SPECIFICATIONS	
Body/bonnet:	N/A
Trim:	N/A
API Trim #:	N/A
Options:	N/A
INDUSTRY STANDARDS	
Design:	ASME B16.34
P-T rating:	ASME B16.34
End connection:	ASME B16.10
Testing:	API 598
Marking/other:	MSS SP25

Note: The dimensions provided in the 3D models are for reference only and should not be used for engineering/design purposes, please contact Bonney Forge Product Engineering to obtain certified dimensions.

Note : - Drawing not to Scale - Dimensions subject to change.	Part No. : 4" 6-61-RF WCB SWING CHECK	 BONNEY FORGE 14496 CROGHAN PIKE P.O. BOX 330 MOUNT UNION, PA 17066 
	Description : Check Valves - Class 600	

SWING CHECK VALVE - BOLTED BONNET
 INTEGRAL RF FLANGED ENDS
 CLASS 600